

TKK 2N Steam Trap

Like any other steam traps TKK 2N has been produced in accordance to German Regulation of Boiler (TRD) / Pressure Vessel (AD) and DIN standard of design and tests. Steam trap with membrane capsule adjusting device can resist on corrosion and does not get effected by water hammer. TKK 2N Steam Trap includes flat strainer. This type of steam trap will operate in any location and includes standard “S” type membrane capsules.



Specification

Type	TKK 2N
Size	15A, 20A, 25A
Maximum permissible pressure	40bar
Maximum operational pressure	32bar
Maximum applied temperature	250°C
Differential pressure	22bar
Connection	screwed, socket weld

► Strainer (over 80 Mesh) installation is required to ahead inlet when installing valve,

Weight

Connections	Socket weld			Screwed		
Size (mm)	15A	20A	25A	15A	20A	25A
Weight (kgs)	1,6	1,5	1,4	1,7	1,7	1,7


Connections

Screwed	NPT acc. to ANSI B1 20.1, BSP acc. to BS 21
Socket Weld	ANSI B 16.11

Dimensions

Cap/Size	L	L1	H	H1	H2
15A	150	95	45	67	40
20A	150	95	45	67	40
25A	150	95	45	67	40

Dimensional drawing

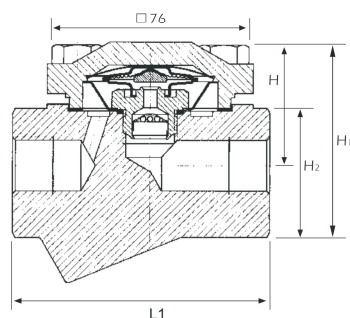

Flow Curve

