

Steam boiler

Pressure Vessel

YSF-5, 6 Type Safety Valve (Full Bore Type)

Features

- Simple structure and outstanding performance.
- Superb performance, followed by strict quality control procedure.
- High impact resistance and good abrasion resistance: The disc and seat are stainless steel welded with satellite.
- Test lever attached: Periodical performance inspections can be conducted.
- Approved by the Korea Occupational Safety and Health Agency (KOSHA).

Specifications

Type		YSF-5	YSF-6
Test lever		Yes	Optional
Applicable fluid		Steam, air	Liquid
Set pressure range		0.1~1.0 MPa	
Fluid temperature		220℃ Below	80℃ Below
End connection	Inlet	KS PT SCREW	
	Outlet	KS PT SCREW	
Material	Body	GC200	
	Disc, seat	STS304, SCS13	
Hydraulic test pressure		SSC 13	

► Install a strainer (40 MESH or more) at the front end when installing the valve.

Dimensions

(mm)

Size Inlet x Outlet	Seat diameter	Throat diameter	Throat area(㎡)	Lift	Face to Face		Height (H)		Connection size	Blow off rate(kg/h)		Weight (kg)	
										YSF-5			
di X do	ds	dt	A	L	L1	L2	YSF-5	YSF-6	OUT	증기	공기	YSF-5	YSF-6
20(¾")X25(1")	18	15	314.2	3.8	50	74	182	180	1"	277	2214	33	3.2
25(1")X32(1¼")	22	19	490.9	5.0	60	85	215	212	1¼"	432	3460	5.2	4.85
40(1½")X50(2")	35	30	1256.6	7.5	80	100	295	293	2"	1107	8857	9.6	9.2
50(2")x65(2½")	45	38	1963.5	9.5	90	115	335	332	2½"	1729	13840	16.0	16.0


» Dimensions (KS B 6216 10K RF Flange)

(mm)


Classification Size	PTA	ø D	ø C	ø g	N-ø h	f	T
20(¾")	1"	125	90	67	4-19	1	18
25(1")	1¼"	135	100	76	4-19	2	20
40(1½")	2"	155	120	96	8-19	2	20
50(2")	2½"	175	140	116	8-19	2	22

For reference

- In order to install the type YSF-5, 6 as a flange, a coupling flange is required by made-to-order.

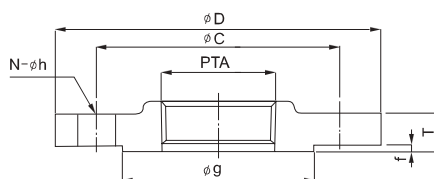

Dimensional drawing

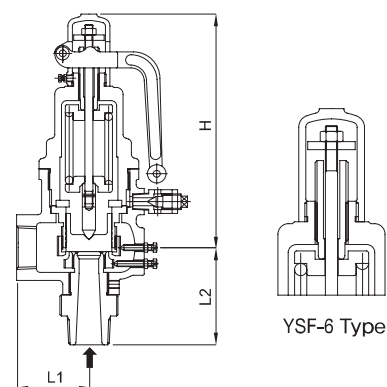

YSF-5 Type

YSF-6 Type

YSF-5 Type

YSF-6 Type